



SIBER

Siber Facade Group Inc.

**Simply
Better
Windows**



SBSD-800 Swing Door



SIBER

Stand-alone or integrated within Siber façade systems, SW800 offers outstanding weather resistance, thermal and acoustic insulation while German-made (G-U) multi-latching hardware ensures peace of mind with enhanced security.

Build for Canadian weather, this door features three stages of silicone seals to ensure the highest level of air/water tightness. With an overall depth of 75mm, the system uses a three-chamber structure with a 36mm thermal break. Double or Triple glazed units up to 44mm thick can be installed. With a spectrum of possible glass makeup and several insulation infill options, thermal and acoustic parameters can be calibrated to fit your project's specific needs.

Regular threshold height of 53mm with ADA compliant options available.

Robust structure, stainless steel core hinges, and additional latch modules allow for oversized door openings.




Features:

- Double or triple glazed up to 44mm
- Multiple levels of Thermal and Acoustic upgrades
- G-U Multi-point lock hardware
- Heavy-duty, adjustable hinges with stainless steel spindle
- Accessibility Threshold options
- Inswing and Outswing options

Technical Information

System Depth	75mm
Max Glass Panel Thickness	44mm
Max Leaf Weight	120kg
Surface Finishes	Anodized, Painted, Powder
Air Permeability	ASTM E283 +/- 75Pa A3
Watertightness	ASTM E547. +720Pa and higher
Structural	ASTM E330 A Over 3.120 kPa.
U-Value	From 0.26 BTU/h-ft ² -°F

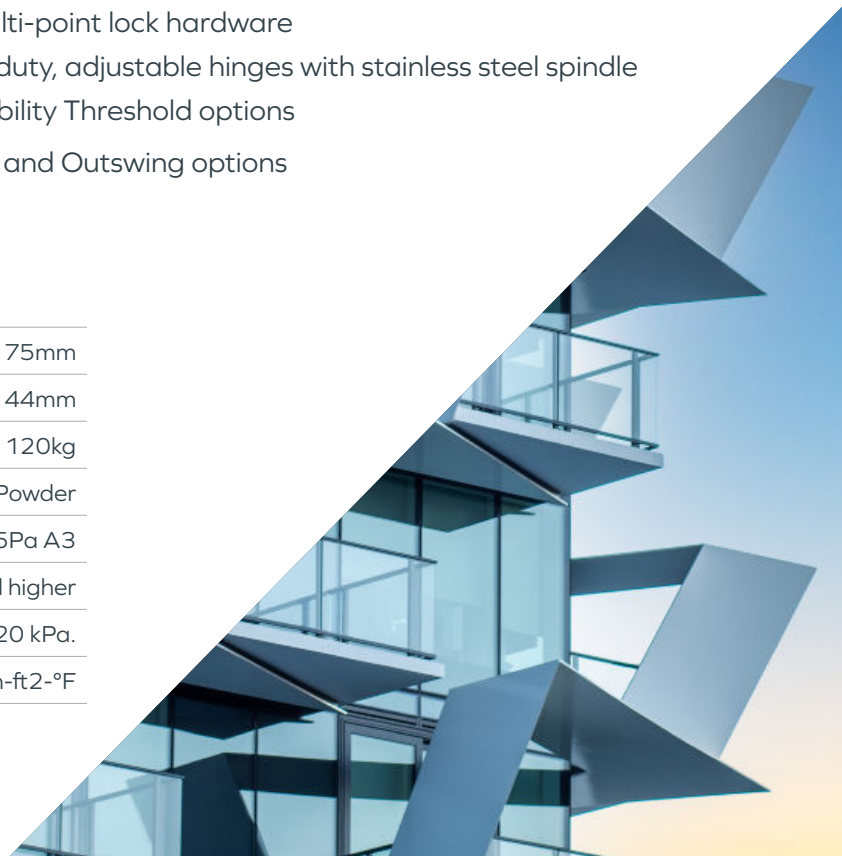



SIBER

<https://siberfacadegroup.com/>

General Contact

info@siberfacadegroup.com

+1-778-379-1408

Suite 230, 7270 Market Crossing

Burnaby, BC Canada V5J 0A2